


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

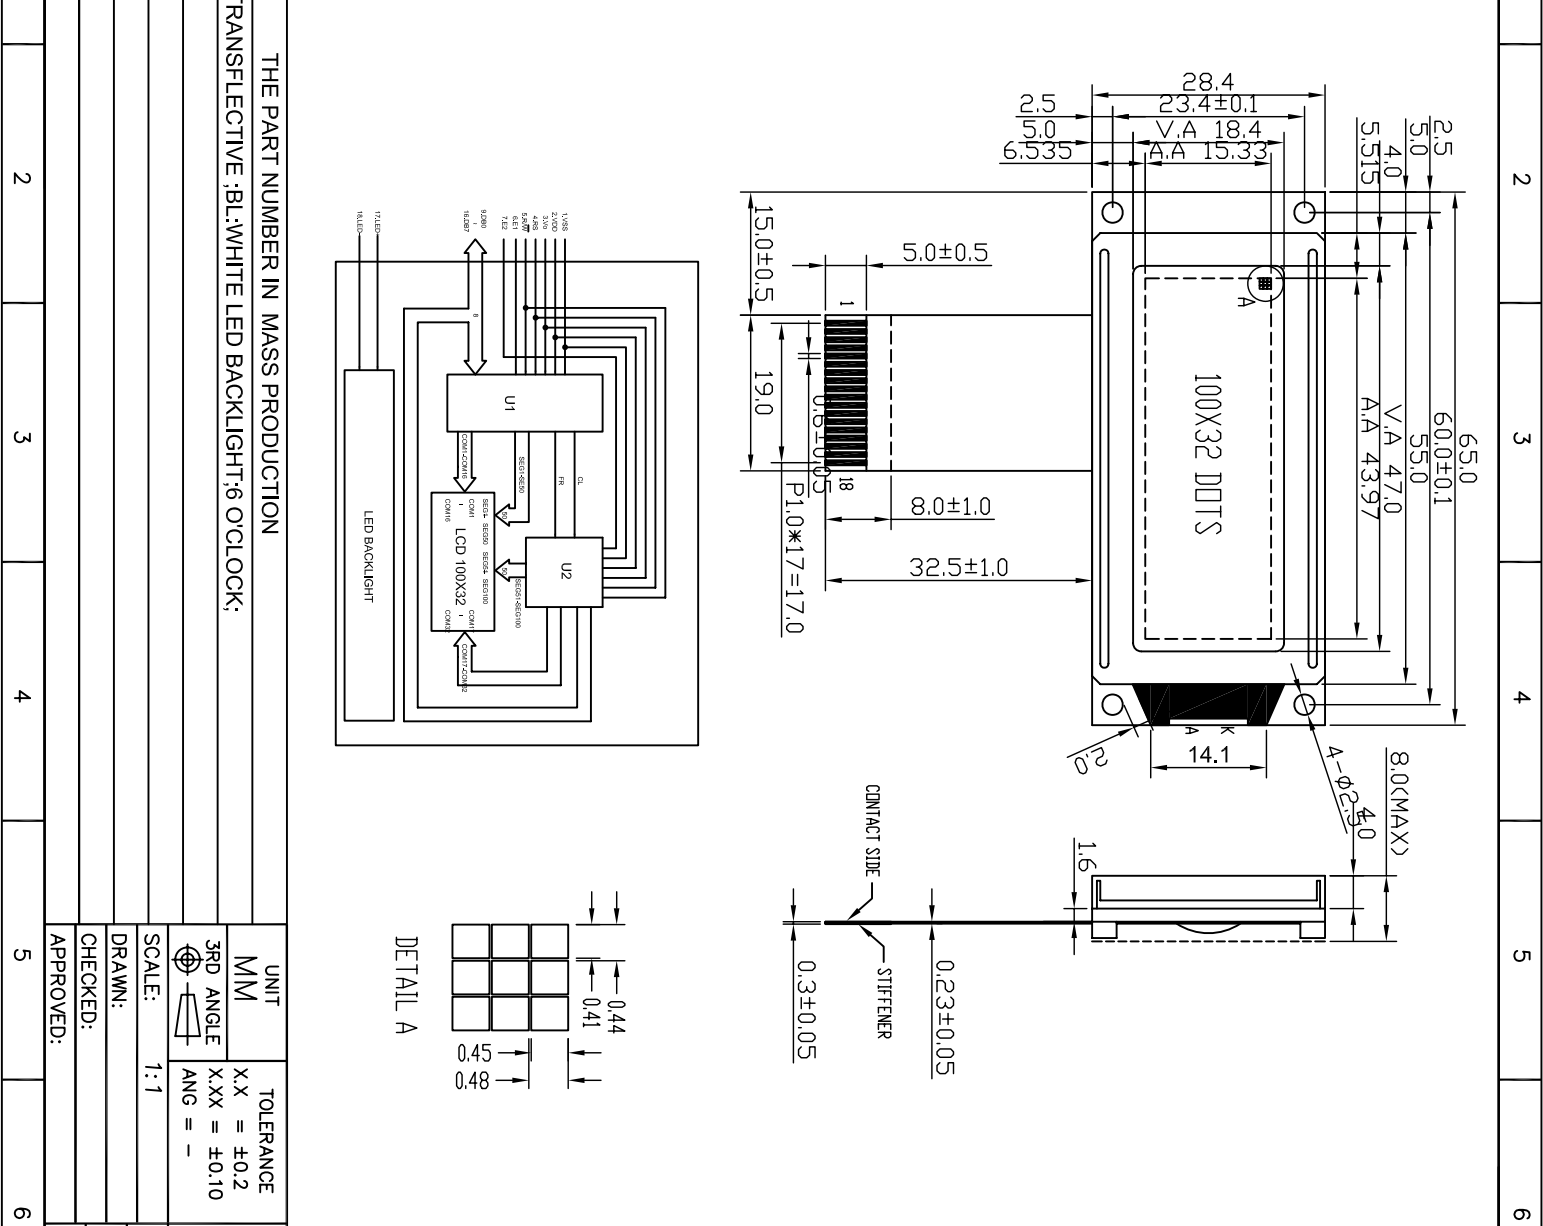

THE PART NUMBER IN MASS PRODUCTION							
1.FSTN/POSITIVE/TRANSPARENT;B.L:WHITE LED BACKLIGHT;6 O'CLOCK;							
1							
2							
3							
4							
5							
6							
7							
8							

UNIT	TOLERANCE
MM	X.X = ±0.2
3RD ANGLE	X.XX = ±0.10
ANG =	-

SCALE:	1:1
DRAWN:	
CHECKED:	
APPROVED:	

TITLE:	LCM
MODEL NO.:	AGM1032A SERIES
PART NO.:	

REV	A
SH NO	1/1

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE STN GRAY MODE STN BLUE MODE FSTN
POLARIZER TYPE	REFLECTIVE TRANSPARENT TRANSMISSIVE, POSITIVE TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK 12 O'CLOCK
LED BACKLIGHT	WHITE Y-G RED GREEN BLUE AMBER
TEMPERATURE RANGE	TRICOLOR STANDARD TEMPERATURE WIDE TEMPERATURE
OPERATING VOLTAGE	5.0V
LED DRIVING VOLTAGE	6.4V
LED DRIVE METHOD	1/32 DUTY, 1/6 BIAS
LED DRIVE IC	PT6620 OR EQUIV

NOTE:  
1. The power supply for backlight is depended on the backlight color and the value of current-limiting resistance.

A	B	C	D	E	F
---	---	---	---	---	---