



20	A3(V)
19	K(0V)
18	V _{ae}
17	RES
16	CS2
15	CS1
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	D/I
3	V0
2	VDD(6V)
1	VSS

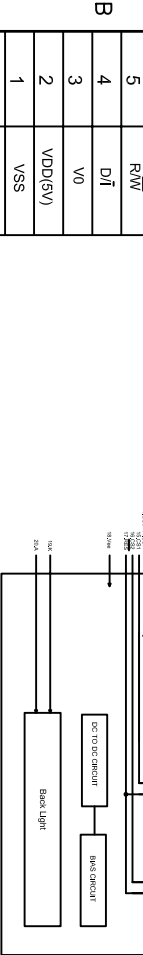

ITEM	SELECTABLE CONTENTS
	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSPARENT
	TRANSMISSIVE POSITIVE
	TRANSMISSIVE NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
	12 O'CLOCK
	WHITE
	Y-G
	RED
	GREEN
	BLUE
	AMBER
LED BACKLIGHT	TRICOLOR
	STANDARD TEMPERATURE
TEMPERATURE RANGE	WIDE TEMPERATURE
OPERATING VOLTAGE	5.0V
LED DRIVING VOLTAGE	9.5V
LED DRIVE METHOD	1/65 DUTY 1/9 BIAS
LED DRIVE IC	SBN0064G-D OR EQUIV

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G)/POSITIVE/TRANSPARENT/BL.Y-G LED BACKLIGHT;6 O'CLOCK;

UNIT	TOLERANCE
MM	X.XX = ±0.2
3RD ANGLE	X.XX = ±0.10
ANG	ANG = -
SCALE:	1:1
DRAWN:	TITLE:
CHECKED:	MODEL NO: AGM12640 SERIES
APPROVED:	PART NO:

DISPLAYTRONIC

XIAMEN ZETTLER ELECTRONICS CO., LTD.

LCM

REV A

SH NO 1/1

1 2 3 4 5 6 7 8