



ITEM	T1	T2
WITH BL	8.6	13.5
WITHOUT BL	4.6	9.5

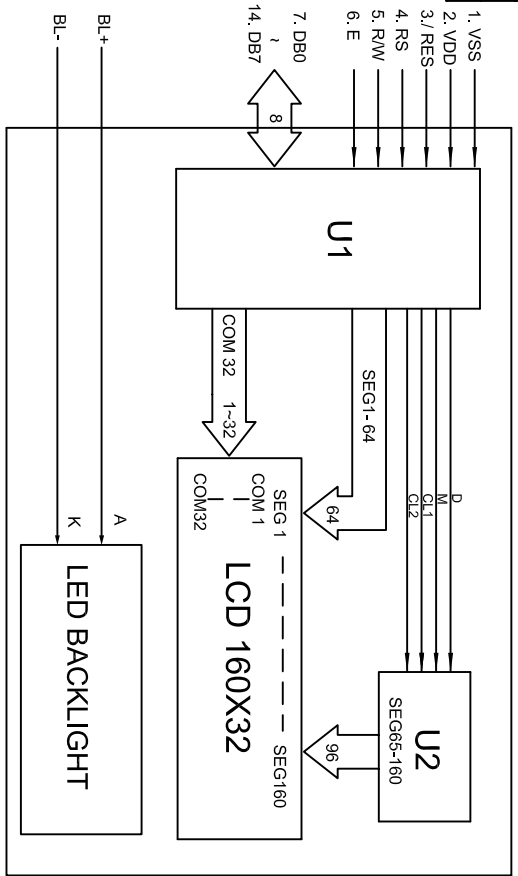

PIN	SYMBOL
1	VSS
2	VDD
3	/RES
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
A	BL+
K	BL-

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G)/POSITIVE/TRANSPARENT REFLECTIVE ;BL;Y-G LED BACKLIGHT

2.--
3.--
4.--
5.--
6.--

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE STN GRAY MODE STN BLUE MODE FSTN
POLARIZER TYPE	REFLECTIVE TRANSPARENT TRANSMISSIVE POSITIVE TRANSMISSIVE NEGATIVE
VIEWING DIRECTION	6 O'CLOCK 12 O'CLOCK WHITE Y-G RED GREEN AMBER
LED BACKLIGHT	TRICOLOR STANDARD TEMPERATURE WIDE TEMPERATURE
TEMPERATURE RANGE	5.0V 4.5V
OPERATING VOLTAGE	1/32 DUTY 1/6 BIAS ST7920 OR EQUIV
LED DRIVE METHOD	BLG-5 code traditional character set GB code simplified character set GB code B1G-5 code and Japanese code
LED DRIVE IC	Font type

NOTE:

- The backlight can be driven by PINA PINK
- The power supply for backlight is depended on the backlight color and the value of current-limiting resistance.

DISPLAYTRONIC

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM
MODEL NO:	AGM16032A SERIES
PART NO:	SH NO 1/1

SCALE:	1:1
DRAWN:	
CHECKED:	
APPROVED:	

UNIT	MM	TOLERANCE	X.X = ±0.2 X.XX = ±0.10 ANG = -
------	----	-----------	---------------------------------------