


Data sheet

UNIQUE ISO CARD

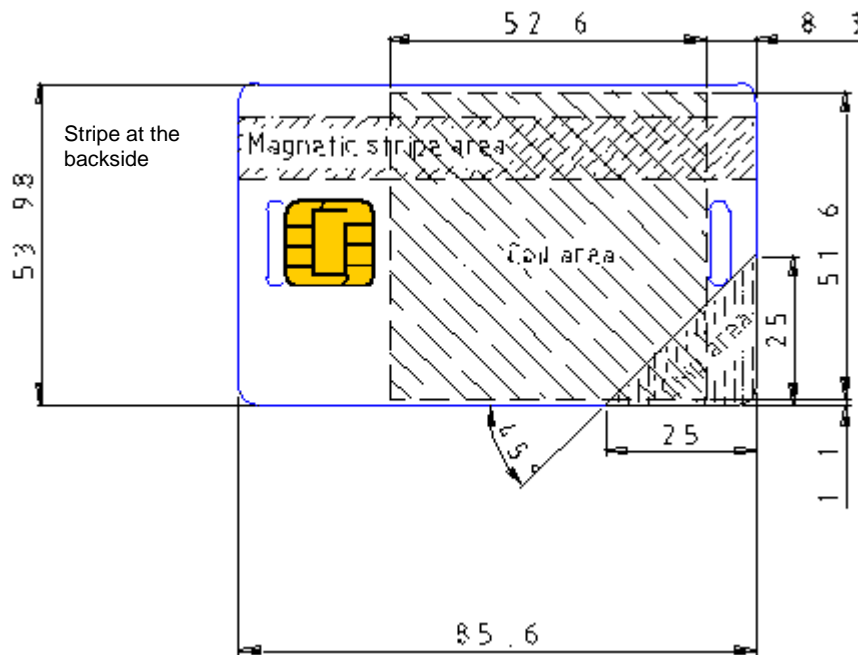

Description

IC type :

Printing :

Slots :

Contact module :

Magnetic stripe :

Res. Frequency :

Material :

Operating temp. :

Resistance :

Specials :

Part number :

Proximity ISO card, flexible Card design to suit to most 125KHz proximity systems.

UNIQUE 64 bits RF/64 ASK Manchester.

Both side are full printable with offset, thermo-transfer and dye sublimation printing.

2 different positions for slots are available.

Customer may embed a contact module at ISO position.

Optional HICO 2750 Oe magnetic stripe in ISO position.

125kHz +/- 6kHz.

PVC, white / white (Glossy).

-35°C and +50°C (-30°F and + 122°F) according to **ISO 7816**.

The card is designed to resist common stress known from access control and time attendance systems.

Different HICO and LOCO magnetic stripe are available on request as well as customized logo prints and holograms.

W/O magn. Stripe : **601401** / 2750 Oe magn. Stripe : **601402**

SOKYMAT reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. SOKYMAT declines all responsibility for the use of product with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.