


Preliminary short data sheet

LOGI TAG 130 Unique

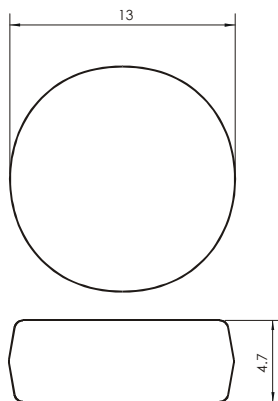

Chip type:	UNIQUE ASK - read only 64 bits		
Physical:	Diameter:	13 mm	± 0.1mm
	Thickness:	4.7 mm	± 0.1mm
	Weight:	1.6g	
	Materiel:	Epoxy over-moulded	
	Colour:	Black	
Electrical:	SRF:	125 kHz	± 6 kHz
	Min. flux density:	22 µT RMS	at room temperature at RT for read mode at 125kHz
Chemical:	Water immersion IP68		(20°C, 24h, 2m)
	HCL(10%), gasoline,		(20°C, 100h)
	bleach, formic acid,		(20°C, 100h)
	caustic soda, oil		(20°C, 100h)
Radiation:	UV radiation		(100mW/cm2, 100h)
Mechanical:	Isostatic pression:	100 bars for 5 min.	
	Axial compression :	800 N	
	Radial compression :	800 N	
Thermal:	Storage :	-20°C to 90°C	1x 1000h
		160°C	1x 2h
	Shock/fatigue:	-20°C to 90°C	10x 5min with transition in 1min.
	Operating:	-25°C to 85°C	
Part number:	601107		

SOKYMAT reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. SOKYMAT declines all responsibility for the use of product with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.